

IST8602-L

Analog TMR Sensor

Preliminary

Datasheet

Table of Contents

1. GENERAL DESCRIPTION	3
1.1 Features and advantages	3
1.2 Applications	3
2. PACKAGE DIMENSION, PIN DESCRIPTION AND APPLICATION CIRCUIT .	4
2.1 Package Dimension	4
2.2 Pin Description and Application Circuit	5
3. SPECIFICATIONS	6
3.1 Magnetic Properties	6
3.2 Electrical Properties.....	6
3.3 Absolute Maximum Ratings	6
3.4 Typical performance graphs	7
4. ORDERING INFORMATION	8

1. General Description

IST8602-L is an analog magnetometer sensor based on the Tunnel MagnetoResistance (TMR) technology. The sensor contains a voltage divider so that can use the sensor as a switch sensor or a position sensor.

IST8602-L is available in LGA4 package.

1.1 Features and advantages

- Base on Tunneling MagnetoResistance (TMR) technology
- Linear output signal from -100 Gauss to +100 Gauss
- High sensitivity as 0.58 mV/V/Gauss
- Temperature range from -40 °C to +125 °C
- Ultralow temperature drift lower than 5 uV/V/°C
- High resistance (Typ. = 6.8 MΩ) for power saving
- LGA4 package

1.2 Applications

- Endpoint detection in cylinders
- Reference monitoring
- Non-contact current sensing
- Magnetic switches

2. Package Dimension, Pin Description and Application Circuit

Aim for various applications, IST8602 is available in LGA4 packages. The ultra-small LGA4 is suitable for wearable devices or periscope lens modules.

2.1 Package Dimension

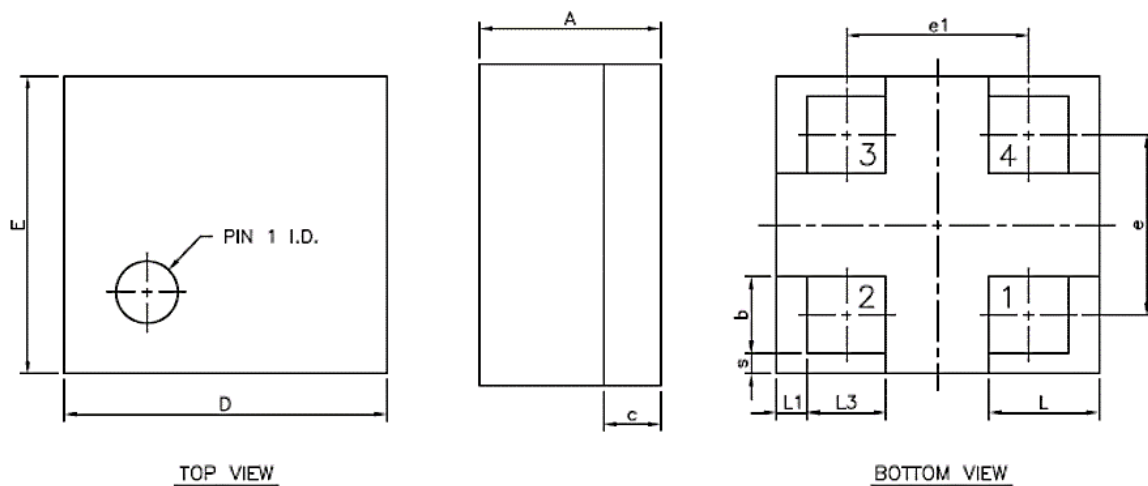


Figure 1. The drawing of LGA4 package

Symbol	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	0.386	0.436	0.486
b	0.135	0.185	0.235
c	---	0.135 REF.	---
D	0.73	0.78	0.83
E	0.67	0.72	0.77
e	---	0.435	---
e1	---	0.44	---
L	0.215	0.265	0.315
L1	0.025	0.075	0.125
L3	0.14	0.19	0.24
s	0.00	0.05	0.10

2.2 Pin Description and Application Circuit

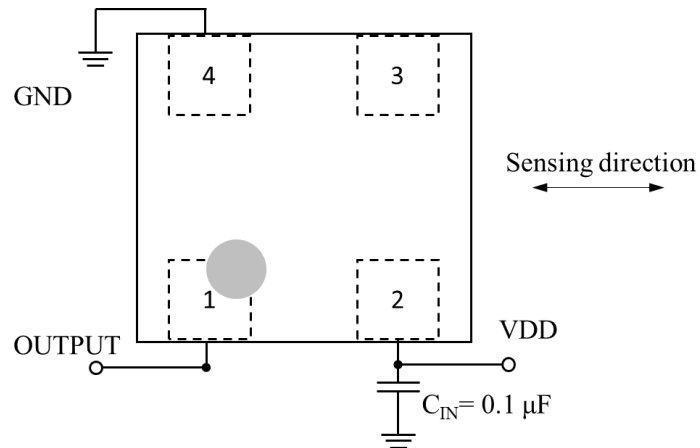


Figure 2. The top-view of pin assignment and application circuit of LGA4 package

Pin	Name	Function
1	OUTPUT	Output
2	VDD	Supply Voltage
3	---	---
4	GND	Ground

3. Specifications

3.1 Magnetic Properties

Symbol	Parameter	Min.	Typ.	Max.	Unit
B _{Sat}	Saturation	-300	~	300	Gauss
B _{Lin}	Linear range ¹⁾	-100	~	+100	Gauss
DR	Dynamic range		±75		Gauss
B _{Hys}	Hysteresis		1		Gauss

¹⁾ Stress of magnetic field beyond B_{Lin} may cause a nonlinear even non-unique output signal, and the sensor has to be reset by turning off the magnetic field.

3.2 Electrical Properties

Operating conditions: T=+25°C; VDD=1.0V; 0.1µF ceramic capacitors tied closely to VDD and GND.

Symbol	Parameter	Min.	Typ.	Max.	Unit
VDD	Supply voltage	-5.5	-	+5.5	V
V _{off}	Bridge offset	-15	-	15	mV/V
R	Sensor resistance		6.8		MΩ
V _{Hys}	Hysteresis		0.58		mV/V
S _{Lin}	Sensitivity		0.58		mV/V/ Gauss
ε _{Lin}	Linearity error		2.3		%FS
TC _R	R temp. coefficient		-2		µV/V/°C
TC _{Sen}	S _{Lin} temp. coefficient		-0.19		%/°C

3.3 Absolute Maximum Ratings

Symbol	Parameter	Min.	Max.	Unit
VDD _{max}	Max supply voltage	-7	7	V
T _{amb}	Ambient temperature	-40	125	°C
ESD _{HBM}	ESD robustness according to HBM	-	250	V

3.4 Typical performance graphs

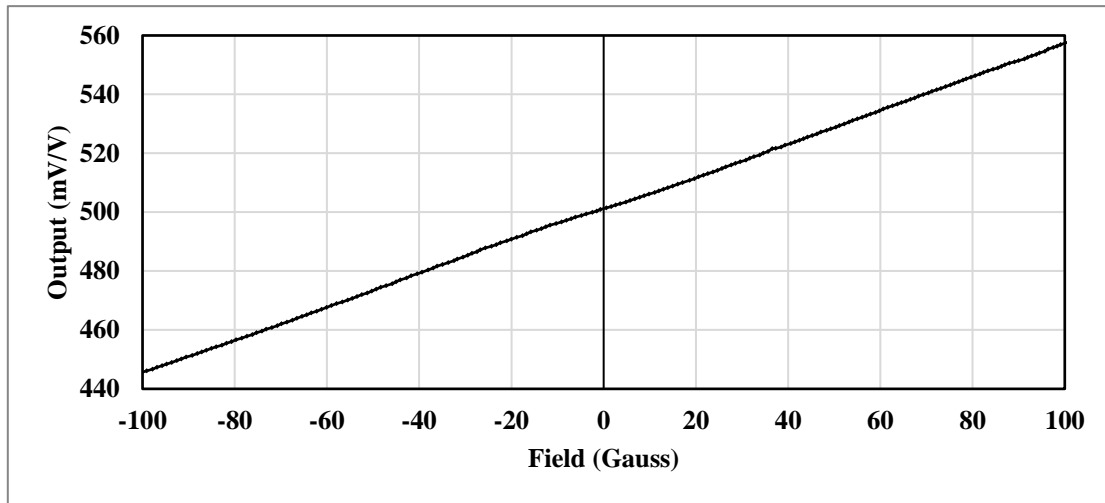


Figure 3. The general output curve of IST8602

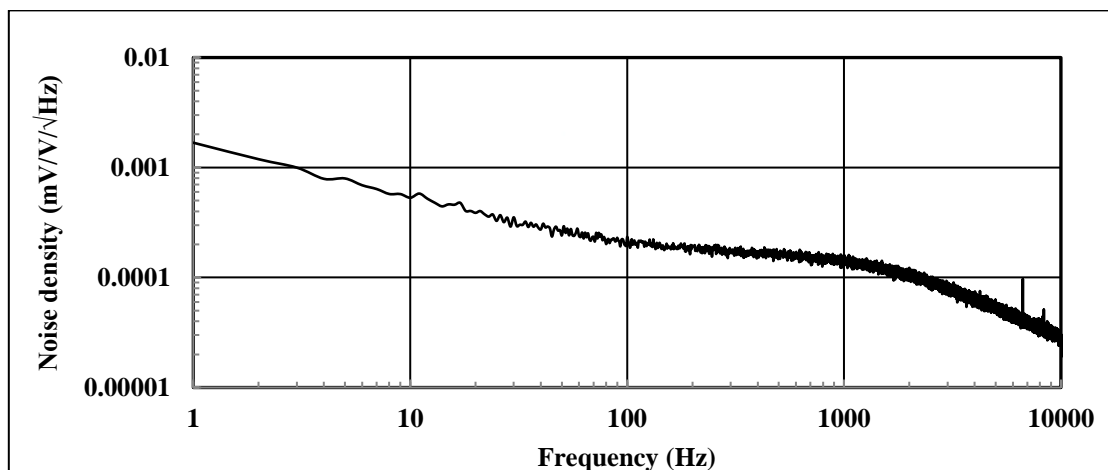


Figure 4. The noise spectrum of IST8602

4. Ordering Information

Order Number	Package Type	Packaging	Temperature Range
IST8602	LGA4	Tape and Reel: 5k pieces per reel	-40 °C to +125 °C

For more information on iSentek's Magnetic Sensors, please contact us by phone at +86-132-6706-8686 (China), +86-755-2991-0201 (China) or +886-2-2698-3306 ext:110 (Taiwan); via e-mail: sales@isentek.com or visit us online at www.isentek.com.

The application circuits herein constitute typical usage and interface of iSentek's product. iSentek does not warranty or assume liability of customer-designed circuits derived from this description or depiction.

iSentek reserves the right to make changes to improve reliability, function or design. iSentek does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others.

US Patent 9,297,863, Taiwanese Patents I437249, I420128 and I463160 apply to our magnetic sensor technology described.